


Extended Diaphragm Seals With Flanged Connection

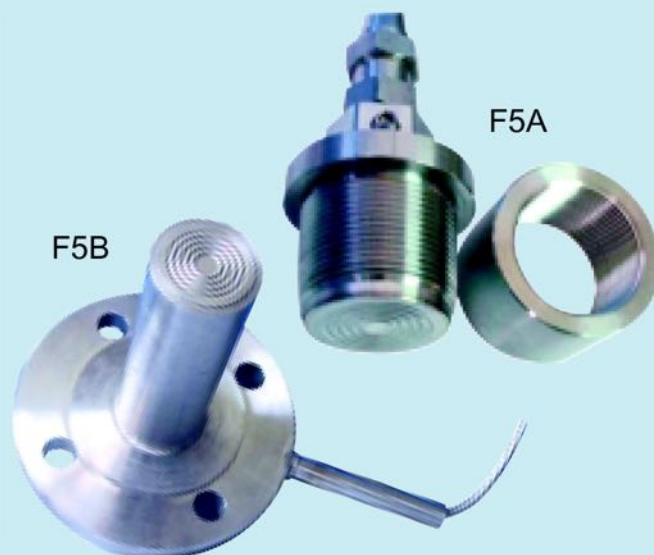

- High temperature: Max 200℃
- Diaphragm material: Hastelloy B, Hastelloy C, Tantalum, Titanium, Monel 316L PTEE coated
- Flange material: 321, 304, 316L
- Instrument connection: other on request
- Filling liquid: As different media, optional fluorocarbon oil, -60-+120℃, Food oil -20-+200℃
- Extension: other on request
- Capillary: max length 6m, material 321 covered with 321 armour, other on request

Specifications

Range: 0-0.06/0-40MPa

Accuracy: (add to instrument accuracy) $\pm 0.5\%$ for direct mounting; $\pm 1\%$ for dampeners, over pressure protector, distance transmission and so on.

Working Temperature: -45-+150℃

Diaphragm Material: 316L

Flange material: 316

Instrument connection: Thread M20*1.5, 1/2" NPT

Flange standard: GB/T9113.1-9121.3-2000

JB/T74-85-1994

HG20592-20621-1997

ANSI B 16.5

DIN 2501

Extension: 0-300mm

Filling liquid: Silicone oil

