

- Designed for use in chemical and petrochemical power plant and pharmaceutical
- Isolate the sensing element of pressure gauges, pressures switches and pressure transmitters from process liquids
- Suitable for corrosive, nonviscous and clean gases or liquids



APPECIFICATIONS

Nominal pressure: 0-40Mpa

Damp adjust able range: 0-100%

Wetted part material: 316+BUNA

Connection: thread M20*1.5M-M20*1.5F

1/2" NPT M-1/2" NPT F

G1/2" M-G1/2" F

SPECIAL VERSIONS


Body material: 321, 304, 316L, Cu

Packing material: as different process temperature

VITON-25-+240°C

Connection: other on request

DIMENSIONS (mm)

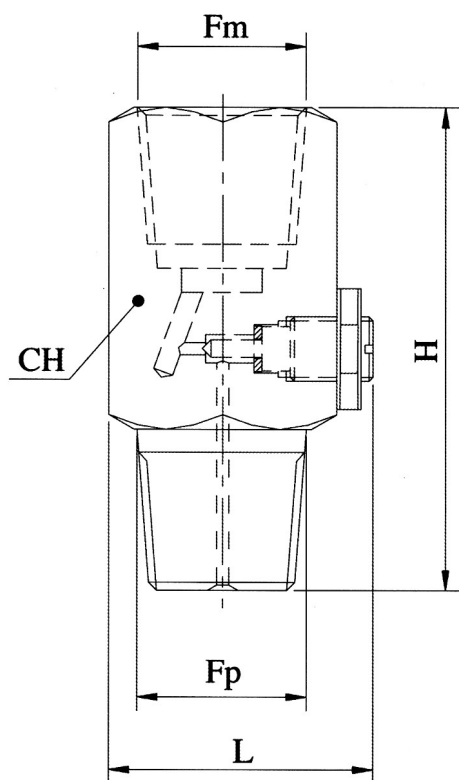

Fp-Fm	L	H	CH
M20x1.5M - M20x1.5F	32	60	28
1/2" NPT M - 1/2" NPT F	32	60	28
G1/2" M - G1/2" F	32	60	28